


**1929-1959**

**CHEVROLET**



**PARTS AND  
ACCESSORIES  
CATALOG**

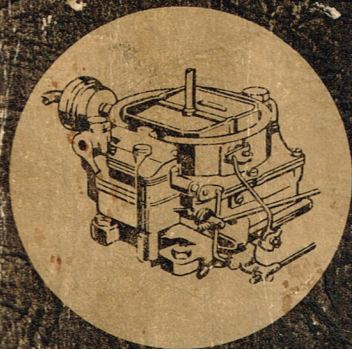

**PASSENGER CAR  
CORVETTE  
LIGHT AND  
MEDIUM TRUCKS**

**EFFECTIVE APRIL 1, 1959**



## INSTALLATION INSTRUCTIONS

### 1959 261 CU. IN. 6 CYLINDER SERIES 6000 ENGINE ASSEMBLY WITH 11" COIL SPRING TYPE CLUTCH(PART NO. 3754663 USED WITH 3 AND 4 SPEED TRANSMISSIONS)

#### SUPPLEMENTAL PARTS REQUIRED FOR CORRESPONDING PAST MODEL APPLICATIONS

##### 1958 MODELS

ITEM	QUANTITY	PART NO.	DESCRIPTION	REMARKS
A.	1	3741533	Generator Brace.....	Can be transferred from replaced engine for Series 62-6600
B.	1	*3694163	Intake Manifold.....	Can be transferred from replaced engine
C.	1	3753871	Intake Manifold Fitting.....	For vacuum take-off

**\*NOTE:** In lieu of Inlet Manifold transfer or replacement, 1959 Carburetor Control Rod 3757133 may be installed and modification of such parts as gasoline and vacuum lines may be necessary.

##### 1957 MODELS

Require items A thru C plus the following:

D.	1	3836756	Gen. Mtg. Bracket.....	Can be transferred from replaced engine
E.	1	3738961	Oil Level Gauge.....	New part required

##### 1956 MODELS

Require B thru E plus the following:

F.	2	3138803	Reducing Bushing.....	5/8" Heater Hose Fitting Adapter
G.	1	3725080	Clutch Pedal Lever.....	Required only when replacing engines having Diaphragm Spring Clutch
H.	1	900018	Clutch Release Bearing.....	

##### 1955 MODELS

Require items B thru H plus the following:

I.	1	3837160	Special Bushing.....	Temperature Gauge, Cylinder Head Adapter
----	---	---------	----------------------	--

#### GENERAL INFORMATION

**NOTE: (1)** Jobs with optional equipment require transfer or replacement of engine parts special to such options.

**NOTE: (2)** When Oil Filter 5575246 is used, the plug located in the cylinder block just above the oil filter inlet hose hole (lower front) must be driven in 5/8" (.63) below the surface of the boss.